

# K405.1 Cable Datasheet

CC, L1B 8p, L1B 8p

Connection cable between XCP-Gateway and ETAS ES59x interface

## Description

The signal cables are manufactured specifically for CSM. Highly durable wires are used, which are characterized by a high interference resistance and a good signal quality.

## Temperature

The temperature range specified for the main cable, excluding connectors, is -40 to 150 °C. The temperature range specified for the connectors may vary depending on the type (e.g. LEMO B connector: -55 to 250 °C; D-Sub: -55 to 105 °C; Banana: -40 to 80 °C; LEMO Redel: -50 to 150 °C).

## Main Cable Diameter

6.2 mm

## Bending Radius

5 x Diameter (permanently installed)

## Connectors

A	L1B	8-pole	Code: L	female
B	L1B	8-pole	Code: F	male

A:




B:




## Variants

Item No.	Cable Name	Length
ART1401030	K405.1-0050	0.5 m
ART1401032	K405.1-0250	2.5 m

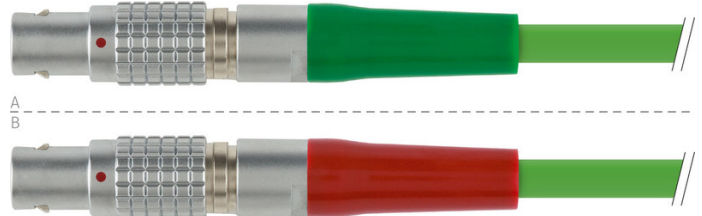

Picture similar to actual product

## Overview

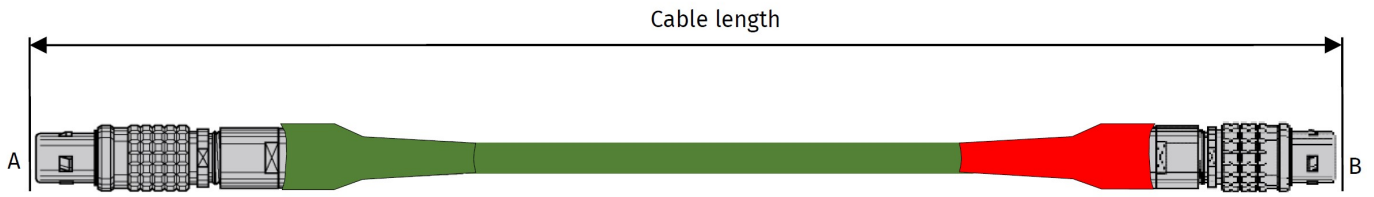

## Pinning

Con. A		Cable	Con. B	
Pin	Signal	Wire Color	Pin	Signal
1	Power +	green	2	Power +
2	Power GND	black	3	Power GND
3	Rx-	purple	5	Tx-
4	Tx-	pink	6	Rx-
5	Rx+	blue	8	Tx+
6	Power GND	black	7	Power GND
7	Power +	green	1	Power +
8	Tx+	red	4	Rx+
Housing	Cable shield	-	Housing	Cable shield



**CSM GmbH**

Raiffeisenstr. 36  
70794 Filderstadt  
Germany

Technical Questions:  
[www.csm.de/service-and-support](http://www.csm.de/service-and-support)

Sales Contact:  
[www.vector.com/contact](http://www.vector.com/contact)

Part of the Vector Group



All trademarks mentioned are property of their respective owners.  
Specifications are subject to change without notice.  
CANopen® and CIA® are registered community trademarks of CAN in Automation e.V.  
EtherCAT® is registered trademark and patented technology,  
licensed by Beckhoff Automation GmbH, Germany.