

# K606 Cable Datasheet

SC, F103 6p, L0B 6p

## Sensor input adapter cable

### Description

The signal cables are manufactured specifically for CSM. Highly durable wires are used, which are characterized by a high interference resistance and a good signal quality.

### Temperature

The temperature range specified for the main cable, excluding connectors, is -50 to 200 °C. The temperature range specified for the connectors may vary depending on the type (e.g. LEMO B connector: -55 to 250 °C; D-Sub: -55 to 105 °C; Banana: -40 to 80 °C; LEMO Redel: -50 to 150 °C).

### Main Cable Diameter



4.5 mm

### Bending Radius

10 x Diameter (permanently installed)

### Connectors

A	F103	6-pole	Code: 1	male
B	L0B	6-pole	Code: A	female




### Variants

Item No.	Cable Name	Length
ART1060400	K606-0020	0.2 m



Picture similar to actual product

## Overview

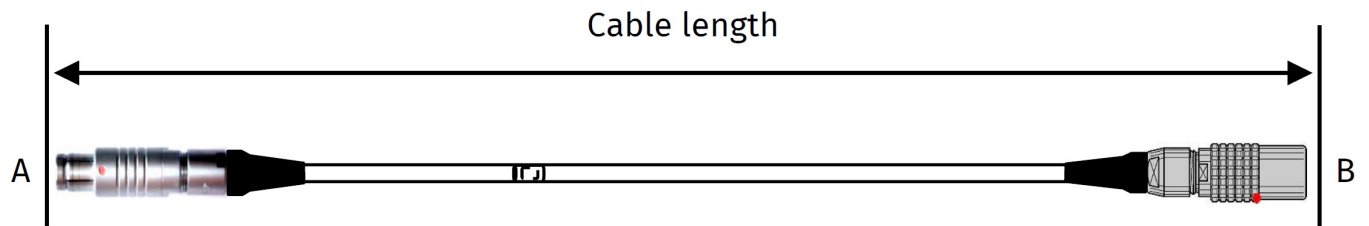

## Pinning

Con. A Pin	Signal	Cable Wire Color	Con. B Pin
5	VIN+	red	1
2	VIN-	black	2
3	VOUT+	orange	4
4	GND	brown	5
6	VOUT-	green	6
1 + Housing	Cable shield	-	Housing
-	-	-	3 n.c.



**CSM GmbH**

Raiffeisenstr. 36  
70794 Filderstadt  
Germany

Technical Questions:  
[www.csm.de/service-and-support](http://www.csm.de/service-and-support)

Sales Contact:  
[www.vector.com/contact](http://www.vector.com/contact)

Part of the Vector Group



All trademarks mentioned are property of their respective owners.  
Specifications are subject to change without notice.  
CANopen® and CIA® are registered community trademarks of CAN in Automation e.V.  
EtherCAT® is registered trademark and patented technology,  
licensed by Beckhoff Automation GmbH, Germany.