

# K665 Cable Datasheet

CC, L0B 2p, Bi 712 3p

## Sync adapter cable for Vector Sync function

### Description

CSM Cables are designed for high-interference resistance.

### Temperature

The temperature range specified for the main cable, excluding connectors, is -50 to 200 °C. The temperature range specified for the connectors may vary depending on the type (e.g. LEMO B connector: -55 to 250 °C; D-Sub: -55 to 105 °C; Banana: -40 to 80 °C; LEMO Redel: -50 to 150 °C).

### Main Cable Diameter

3.7 mm


### Bending Radius

10 x Diameter (permanently installed)


### Connectors

A	L0B	2-pole	Code: G	male
B	Bi 712	3-pole		female

A:




B:




### Variants

Item No.	Cable Name	Length
ART1403000	K665-0200	2 m

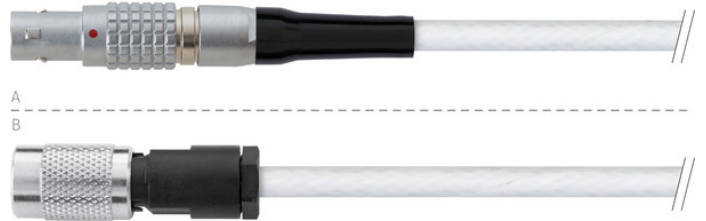

Picture similar to actual product

## Overview

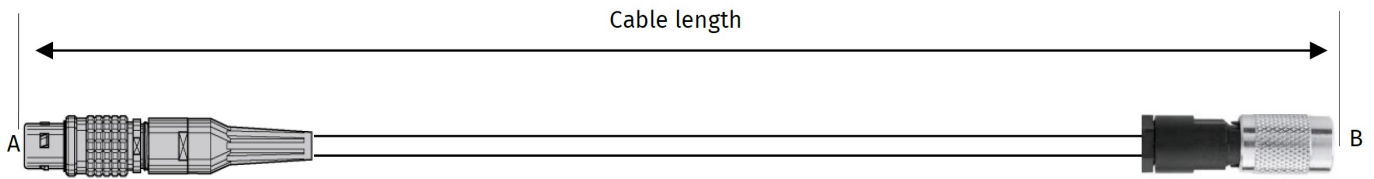

## Pinning

Con. A Pin	Cable		Con. B Pin
	Signal	Wire Color	
1	Sync_IO	brown	2
2	Sync_GND	black	3
Housing	Cable shield	-	-
-	-	-	1 n.c.



**CSM GmbH**

Raiffeisenstr. 36  
70794 Filderstadt  
Germany

Technical Questions:  
[www.csm.de/service-and-support](http://www.csm.de/service-and-support)

Sales Contact:  
[www.vector.com/contact](http://www.vector.com/contact)

Part of the Vector Group



All trademarks mentioned are property of their respective owners.  
Specifications are subject to change without notice.  
CANopen® and CIA® are registered community trademarks of CAN in Automation e.V.  
EtherCAT® is registered trademark and patented technology,  
licensed by Beckhoff Automation GmbH, Germany.