

# K833 Cable Datasheet

SC, OA1 8p, open, TR

Signal cable between signal input/measurement module and sensor, open cable end, TEDS chip integrated

## Description

The signal cables are manufactured specifically for CSM. Highly durable wires are used, which are characterized by a high interference resistance and a good signal quality.

## Temperature

The temperature range specified for the main cable, excluding connectors, is -40 to 150 °C. The temperature range specified for the connectors may vary depending on the type (e.g. LEMO B connector: -55 to 250 °C; D-Sub: -55 to 105 °C; Banana: -40 to 80 °C; LEMO Redel: -50 to 150 °C).

## Main Cable Diameter



5 mm

## Bending Radius

5 x Diameter (permanently installed)


## Connectors

<b>A</b>	OA1	8-pole	Code: C	male
<b>B</b>	open			




## Variants

Item No.	Cable Name	Length
ART1421010	K833-0120	1.2 m
	I1: 0.05 m	
ART1421011	K833-0200	2 m
	I1: 0.05 m	
ART1421020	K833-0700	7 m
	I1: 0.05 m	

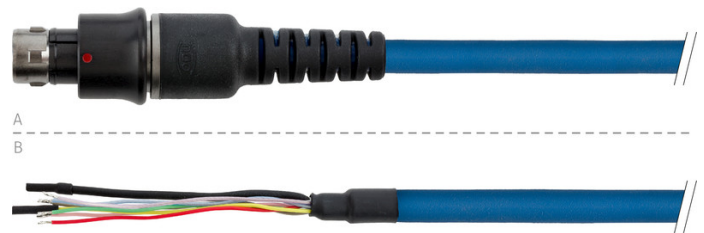

Picture similar to actual product

## Overview

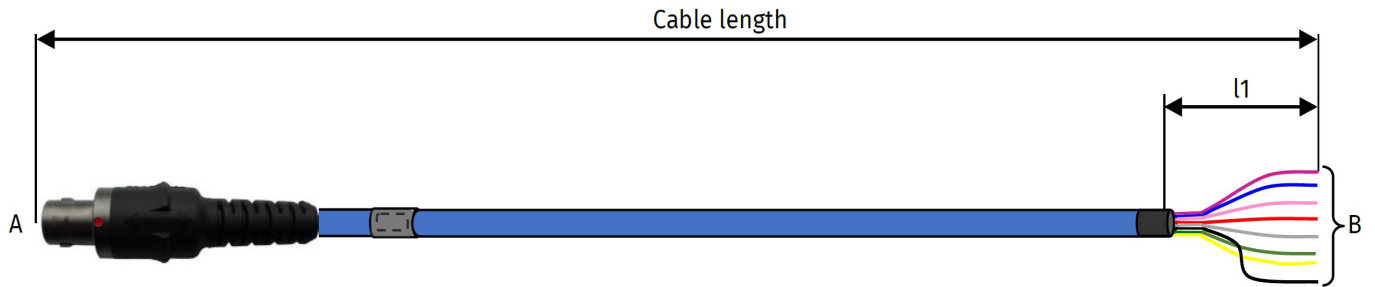

## Pinning

Connector Pin	ADMM Signal	STGMM Signal	Cable Wire Color
1	VIN-	VIN-	purple
2	VIN+	VIN+	blue
3	GND	VOUT-	pink
4	VOUT+	VOUT+	red
5	VOUT-	VSENSE-	grey
6		VSENSE+	green
7	Channel shield	Channel shield	black
8	Data	Data	yellow
Housing	Cable shield	Cable shield	



**CSM GmbH**

Raiffeisenstr. 36  
70794 Filderstadt  
Germany

Technical Questions:  
[www.csm.de/service-and-support](http://www.csm.de/service-and-support)

Sales Contact:  
[www.vector.com/contact](http://www.vector.com/contact)

Part of the Vector Group



All trademarks mentioned are property of their respective owners.  
Specifications are subject to change without notice.  
CANopen® and CIA® are registered community trademarks of CAN in Automation e.V.  
EtherCAT® is registered trademark and patented technology,  
licensed by Beckhoff Automation GmbH, Germany.